


ELECTRICAL SCHEMATIC

440-480 VAC 3 PHASE

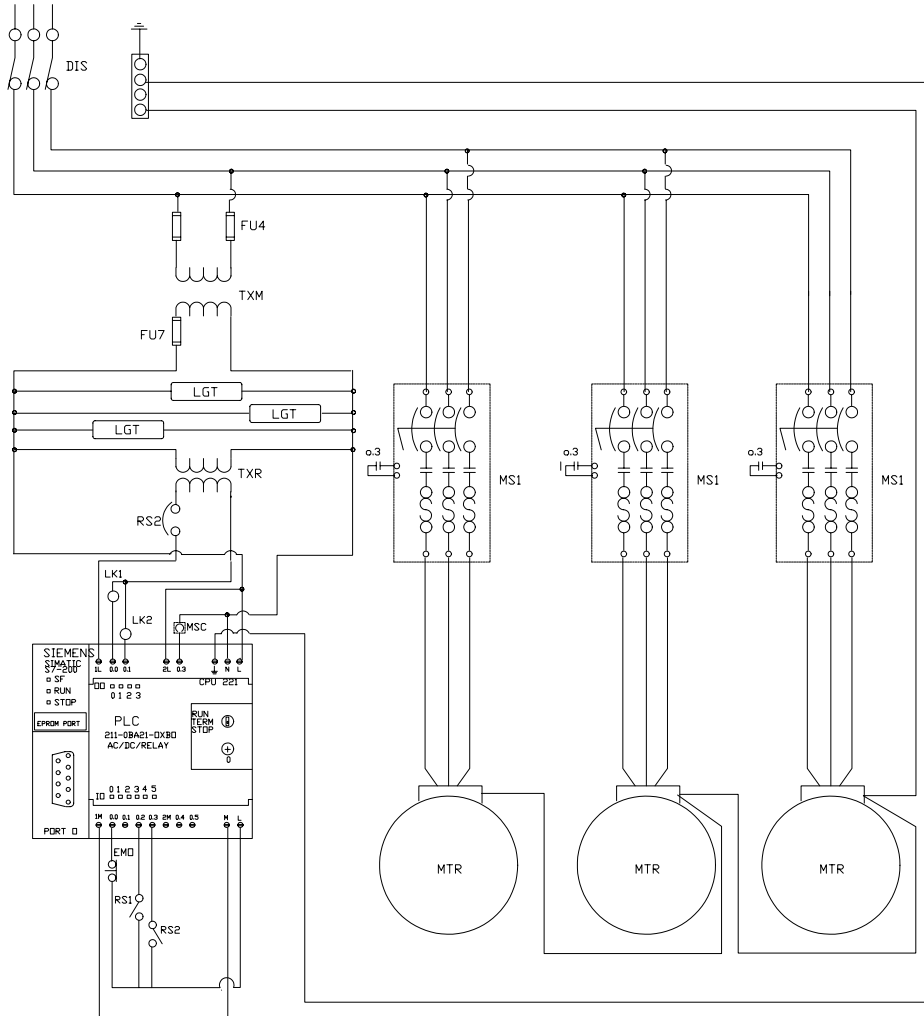

LEGEND

- DIS 30 amp disconnect switch with lockout.
- EMO Emergency-off switch with N.C. contact.
- FU4 2 Amp fuse
- FU7 7 Amp fuse
- LGT Flourescent Light fixture (.76A @ 120V).
- LK1 Lock for door 1 (.250A @ 24VDC).
- LK2 Lock for door 2 (.250A @ 24VDC).
- MTR 3HP 3-phase motor for main blower
- MSC Motor starter coil (60mA @ 120V).
- PLC Programmable controller (20mA @ 120V).
- RS1 Reed switch for door 1.
- RS2 Reed switch for door 2.
- TXR 208-230 VAC to 120 VAC Transformer
- TXM 120 VAC to 24 VDC Transformer

CONTRACT NO.	DATE	COMPANY ASPT Inc.		
DRAWN BY HSD		TITLE AIR SHOWER SCHEMATIC		
CHECKED BY		SIZE A	FSCM NO.	DWG NO. / FILE NAME
DESIGNED BY		SCALE	DATE	SHEET 2 of 2
DESIGN ACTIVITY				
CUSTOMER				